

Slim PanelFeature: **EDGE LIT**

- Super slim and compact design for flexible installation.
- Install directly without the housing can.
- Air tight and IC-rated.
- Damp location.
- Energy Star and ETL/cETL rated.



APP CONTROL



WIFI ENABLED



16 MILLION COLORS



COOL & WARM



TIMER



VOICE CONTROL



SHARE ACCESS



DIMMABLE



GROUP CONTROL



SCENE SETTING

4" Round Edge lit Slim Panel

08



DR0304DXXWH-10

Single CCT



DR0304G13WH-10



DR0304G15WH-10

3-CCT or 5-CCT



DR0304WE1WH-10


WORKS WITH
amazon alexa

works with
Google Assistant



Smart series

PRODUCT DIMENSIONS

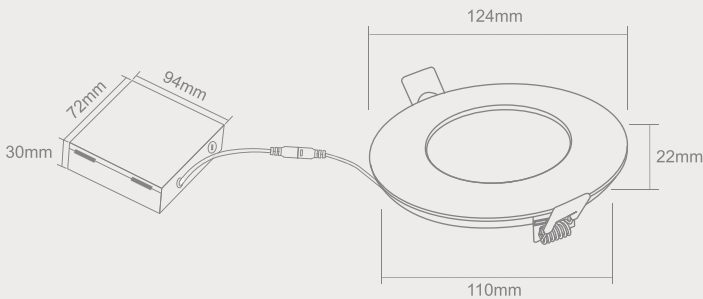

CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DR0304DXXWH-10	10W	120VAC 60Hz	650/600	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT / 5CCT										
DR0304G13/G15WH-10	10W	120VAC 60Hz	650/600	Any 3/5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
SMART SERIES										
DR0304WE1WH-10	10W	120VAC 60Hz	600/550	RGB+2700K~6500K	≥80/90	0.9	120°	YES	35,000H	3 years

· Where "XX" represent different color temperature, it can be 27, 30, 40 and 50.



DQ0304DXXWH-10



DQ0304G13WH-10



DQ0304G15WH-10



DQ0304WE1WH-10



DQ0304G13WH-10



DQ0304G15WH-10

Change the CCT by dip switch on driver box and wall switch.

Change the CCT by dip switch on driver box and wall switch.

Change the CCT by dip switch on driver box and wall switch.

RGBCW color changing

DQ0304WE1WH-10

WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

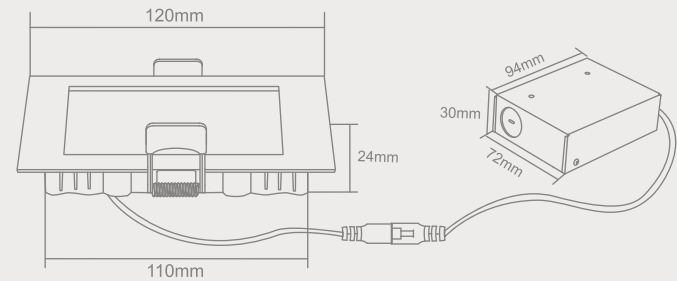

CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DQ0304DXXWH-10	10W	120VAC 60Hz	650/600	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT / 5CCT										
DQ0304G13/G15WH-10	10W	120VAC 60Hz	650/600	Any 3/5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
SMART SERIES										
DQ0304WE1WH-10	10W	120VAC 60Hz	600/550	RGB+2700K~6500K	≥80/90	0.9	120°	YES	35,000H	3 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.



DR0306DXXWH-12



DR0306G13WH-12



DR0306G15WH-12



DR0306WE1WH-12



DR0306G13WH-12



DR0306G15WH-12

Change the CCT by dip switch on driver box and wall switch.

Change the CCT by dip switch on driver box and wall switch.

Change the CCT by dip switch on driver box and wall switch.

RGBCW color changing

DR0306WE1WH-12

WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

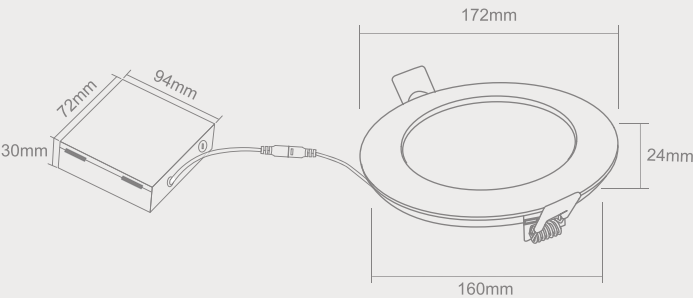

CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DR0306DXXWH-12	12W	120VAC 60Hz	1000/900	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT / 5CCT										
DR0306G13/G15WH-12	12W	120VAC 60Hz	1000/900	Any 3/5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
SMART SERIES										
DR0306WE1WH-12	12W	120VAC 60Hz	900/800	RGB+2700K~6500K	≥80/90	0.9	120°	YES	35,000H	3 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.



DQ0306DXXWH-12



DQ0306G13WH-12



DQ0306G15WH-12



Change the CCT by dip switch on driver box and wall switch.

DQ0306G13WH-12



Change the CCT by dip switch on driver box and wall switch.

DQ0306G15WH-12

RGBCW color changing



DQ0306WE1WH-12

WORKS WITH amazon alexa

works with Google Assistant

tuya

RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series



DR0308DXXWH-15



DR0308G13WH-15



DR0308G15WH-15



Change the CCT by dip switch on driver box and wall switch.

DR0308G13WH-15



Change the CCT by dip switch on driver box and wall switch.

DR0308G15WH-15

RGBCW color changing



DR0308WE1WH-15

WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

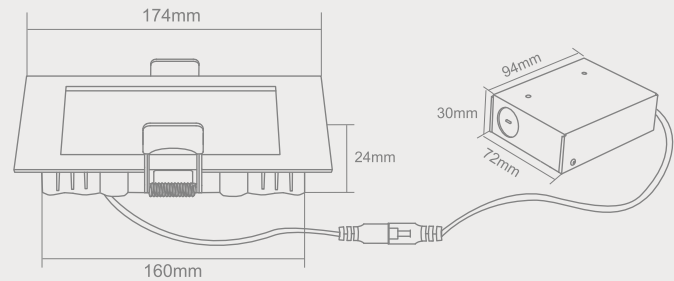


CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DQ0306DXXWH-12	12W	120VAC 60Hz	1000/900	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT / 5CCT										
DQ0306G13/G15WH-12	12W	120VAC 60Hz	1000/900	Any 3/5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
SMART SERIES										
DQ0306WE1WH-12	12W	120VAC 60Hz	900/800	RGB+2700K~6500K	≥80/90	0.9	120°	YES	35,000H	3 years

PRODUCT DIMENSIONS

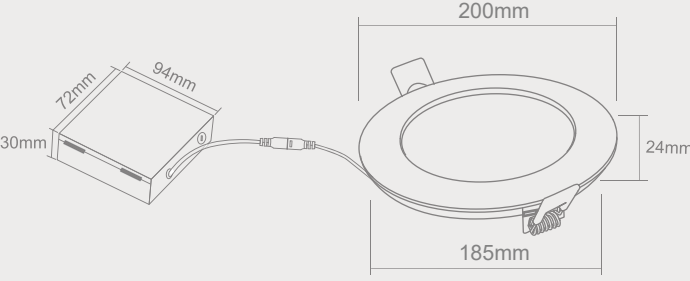

CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DR0308DXXWH-15	15	120VAC 60Hz	1300/1200	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT / 5CCT										
DR0306G13/G15WH-15	15	120VAC 60Hz	1300/1200	Any 3/5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
SMART SERIES										
DR0308WE1WH-15	15	120VAC 60Hz	1200/1100	RGB+2700K~6500K	≥80/90	0.9	120°	YES	35,000H	3 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.



DQ0308DXXWH-15



DQ0308G13WH-15



DQ0308G15WH-15



Change the CCT by dip switch on driver box and wall switch.

DQ0308G13WH-15



Change the CCT by dip switch on driver box and wall switch.

DQ0308G15WH-15

RGBCW color changing



DQ0308WE1WH-15

WORKS WITH
amazon alexa

works with
Google Assistant

tuya



RGB + WW + CW

Single CCT 3-CCT or 5-CCT Smart series

PRODUCT DIMENSIONS

CERTIFICATES

SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DQ0308DXXWH-15	15	120VAC 60Hz	1300/1200	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT / 5CCT										
DQ0306G13/G15WH-15	15	120VAC 60Hz	1300/1200	Any 3/5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
SMART SERIES										
DQ0308WE1WH-15	15	120VAC 60Hz	1200/1100	RGB+2700K~6500K	≥80/90	0.9	120°	YES	35,000H	3 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.



New Slim Panel Feature :

BACKLIT

- Backlit in higher lumen efficiency
- Isolated Power Supply
- Super slim in 0.63 inches thickness
- IC-Rated Airtight
- Dimmable in 100-10% smooth dimming capability



DR1604DXXWH-08



Change the CCT by dip switch on driver box and wall switch.

DR1604G13WH-08



Change the CCT by dip switch on driver box and wall switch.


DR1604G15WH-08

Single CCT

3-CCT

5-CCT

PRODUCT DIMENSIONS

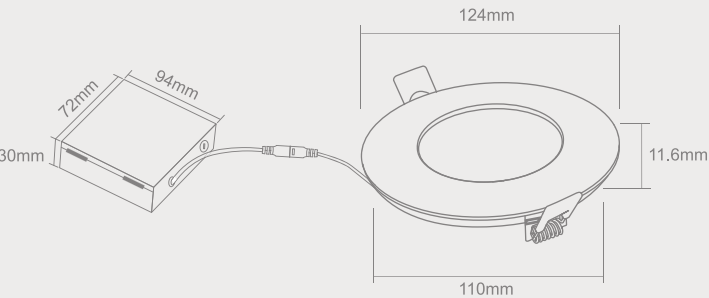

CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DR1604DXXWH-08	8W	120VAC 60Hz	650/600	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT										
DR1604G13WH-08	8W	120VAC 60Hz	650/600	Any 3 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
5CCT										
DR1604G15WH-08	8W	120VAC 60Hz	650/600	Any 5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.



DR1606DXXWH-12



Change the CCT by dip switch on driver box and wall switch.

DR1606G13WH-12



Change the CCT by dip switch on driver box and wall switch.


DR1606G15WH-12

Single CCT

3-CCT

5-CCT

PRODUCT DIMENSIONS

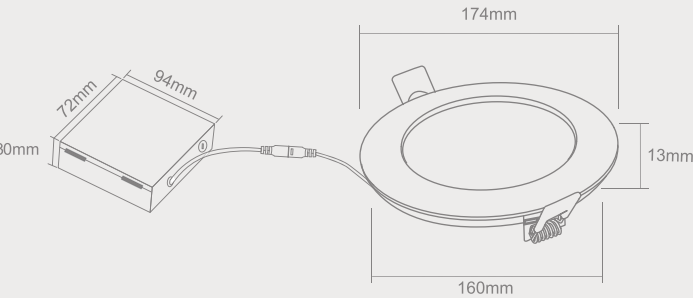


CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DR1606DXXWH-12	12W	120VAC 60Hz	1000/900	2700K-6500K	≥80/90	0.9	120°	YES	35,000H	3 years
3CCT										
DR1606G13WH-12	12W	120VAC 60Hz	1000/900	Any 3 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years
5CCT										
DR1606G15WH-12	12W	120VAC 60Hz	1000/900	Any 5 colors you like	≥80/90	0.9	120°	YES	35,000H	3 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.

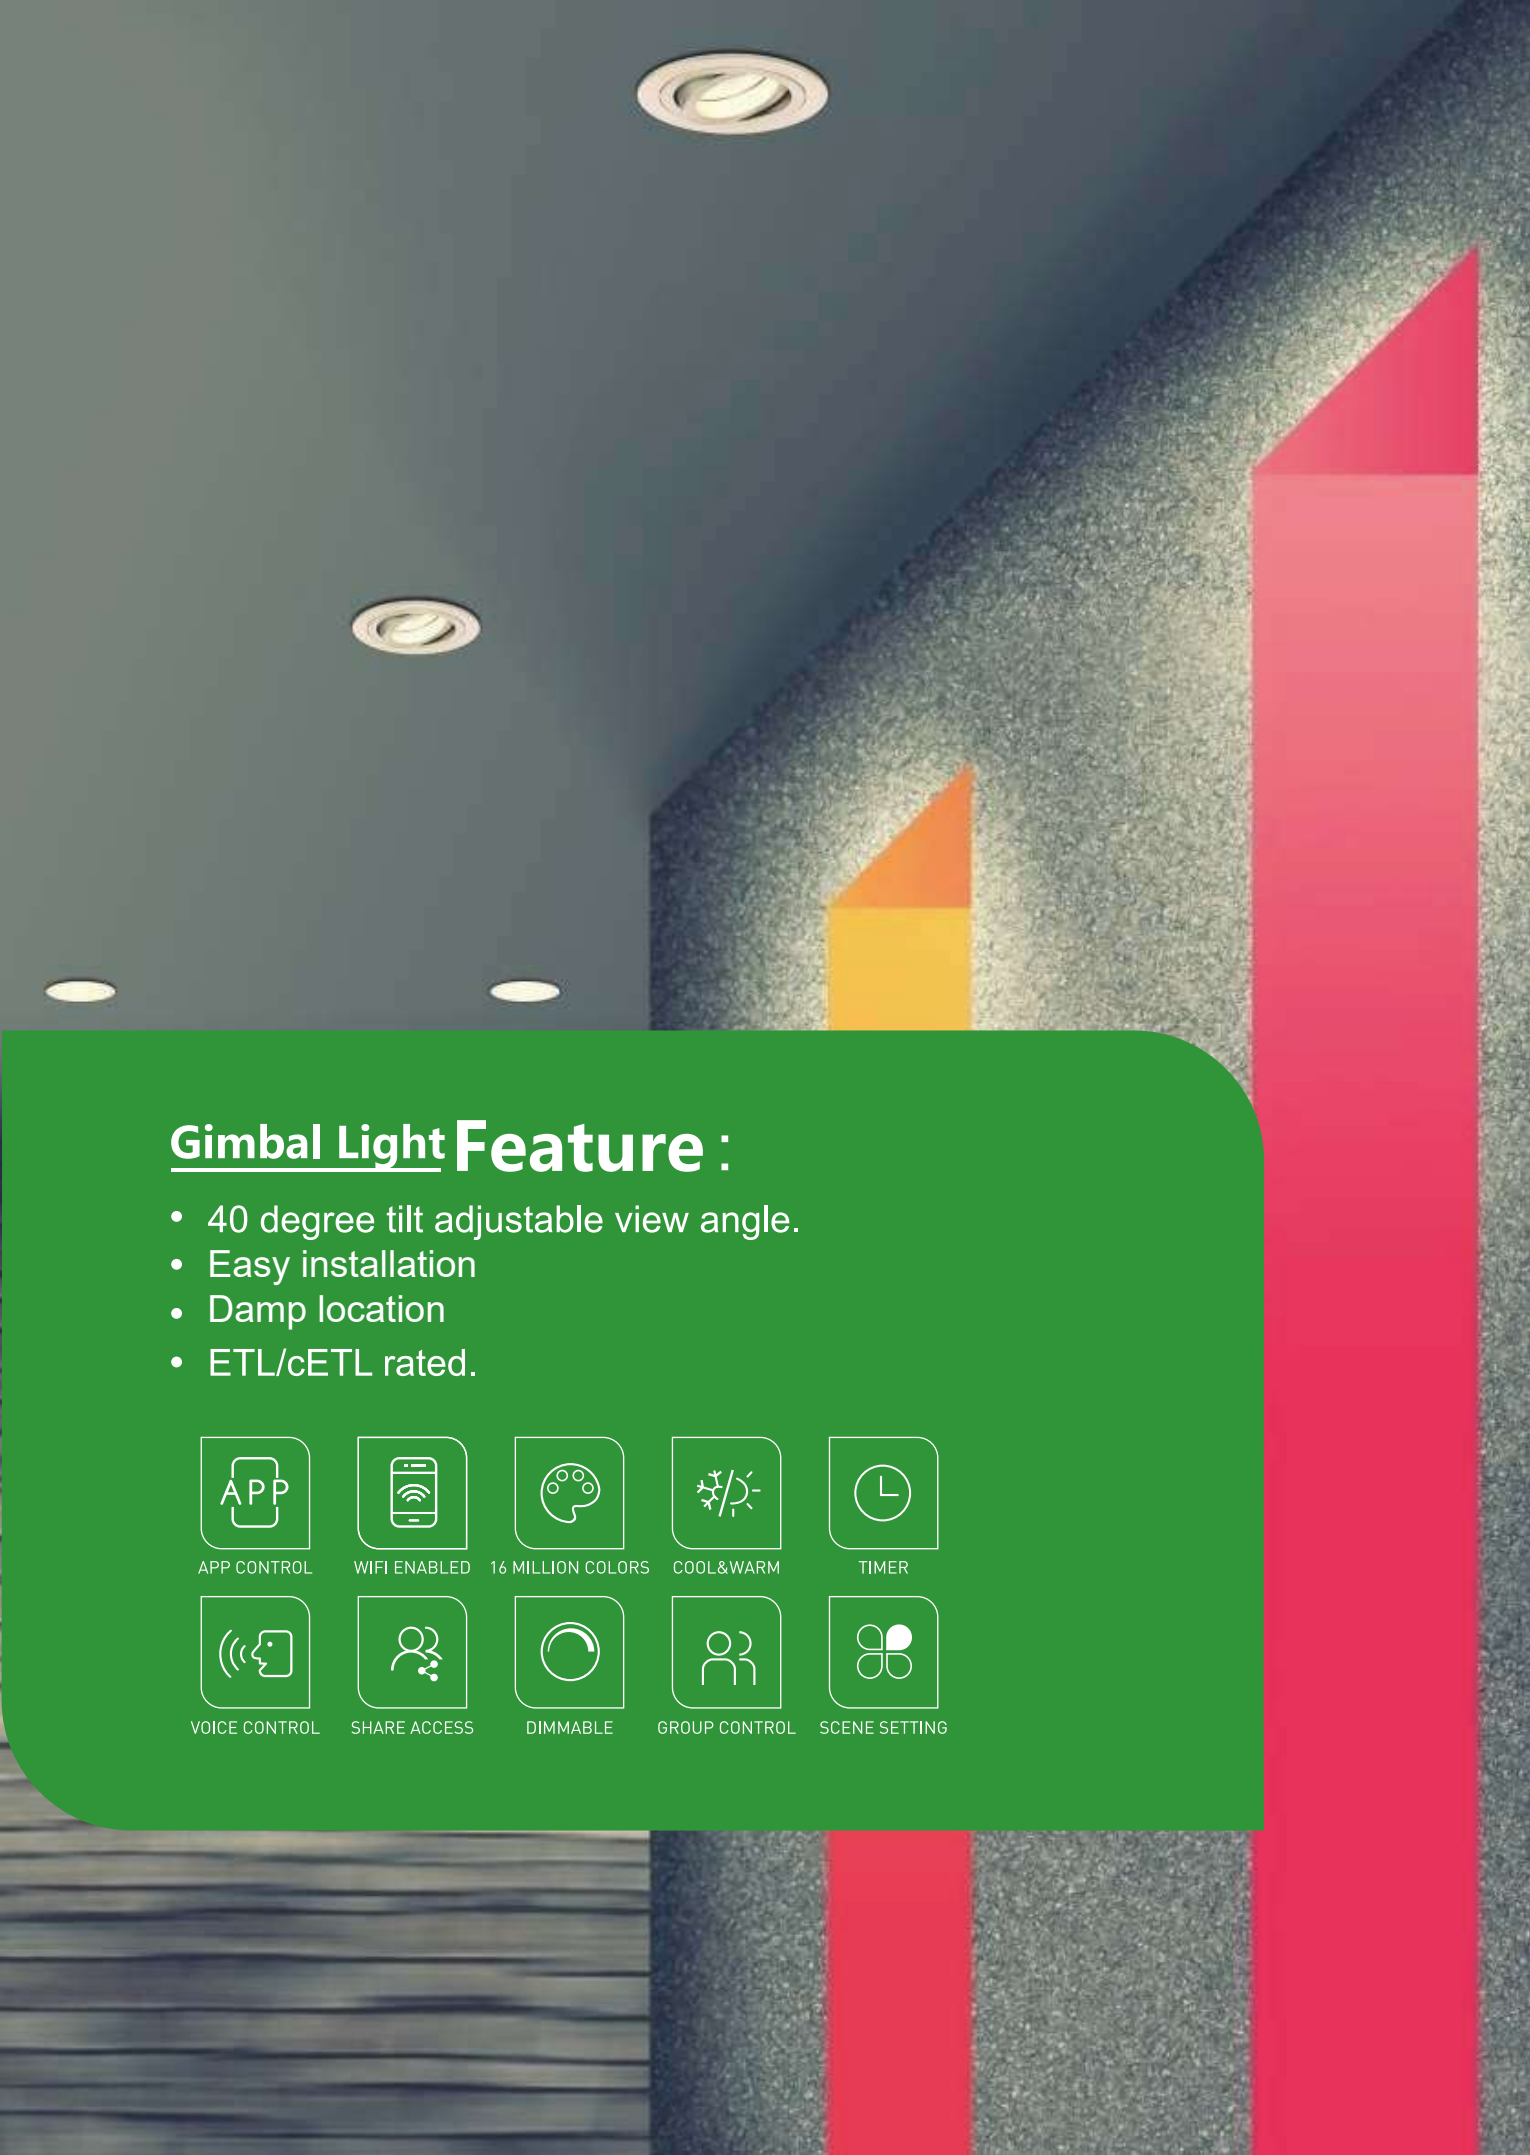

Gimbal Light Feature :

- 40 degree tilt adjustable view angle.
- Easy installation
- Damp location
- ETL/cETL rated.



APP CONTROL



WIFI ENABLED



16 MILLION COLORS



COOL&WARM



TIMER



VOICE CONTROL



SHARE ACCESS



DIMMABLE



GROUP CONTROL



SCENE SETTING

4" Float Gimbal light



DW0504DXXWH-10

Single CCT



Change the CCT by dip switch on driver box and wall switch.

DW0504G13WH-10

3-CCT




Change the CCT by dip switch on driver box and wall switch.

DW0504G15WH-10

5-CCT

PRODUCT DIMENSIONS

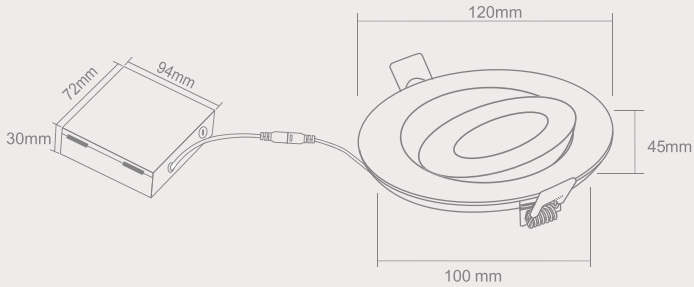




CERTIFICATES



SPECIFICATION



Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DW0504DXXWH-10	10W	120VAC 60Hz	700/650	2700-6500K	≥80/90	0.9	40/360	YES	35,000H	3 years
3CCT										
DW0504G13WH-10	10W	120VAC 60Hz	700/650	Any 3 colors you like	≥80/90	0.9	40/360	YES	35,000H	3 years
5CCT										
DW0504G15WH-10	10W	120VAC 60Hz	700/650	Any 5 colors you like	≥80/90	0.9	40/360	YES	35,000H	3 years

· Where "XX" represent different color temperature, it can be 27,30,40 and 50.





DW0604DXXWH-10

Single CCT



DW0604G13WH-10

3-CCT



DW0604G15WH-10

5-CCT


PRODUCT DIMENSIONS

CERTIFICATES

SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DW0604DXXWH-10	10W	120VAC 60Hz	700/650	2700-6500K	≥80/90	0.9	40°	YES	35,000H	3 years
3CCT										
DW0604G13WH-10	10W	120VAC 60Hz	700/650	Any 3 colors you like	≥80/90	0.9	40°	YES	35,000H	3 years
5CCT										
DW0604G15WH-10	10W	120VAC 60Hz	700/650	Any 5 colors you like	≥80/90	0.9	40°	YES	35,000H	3 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.

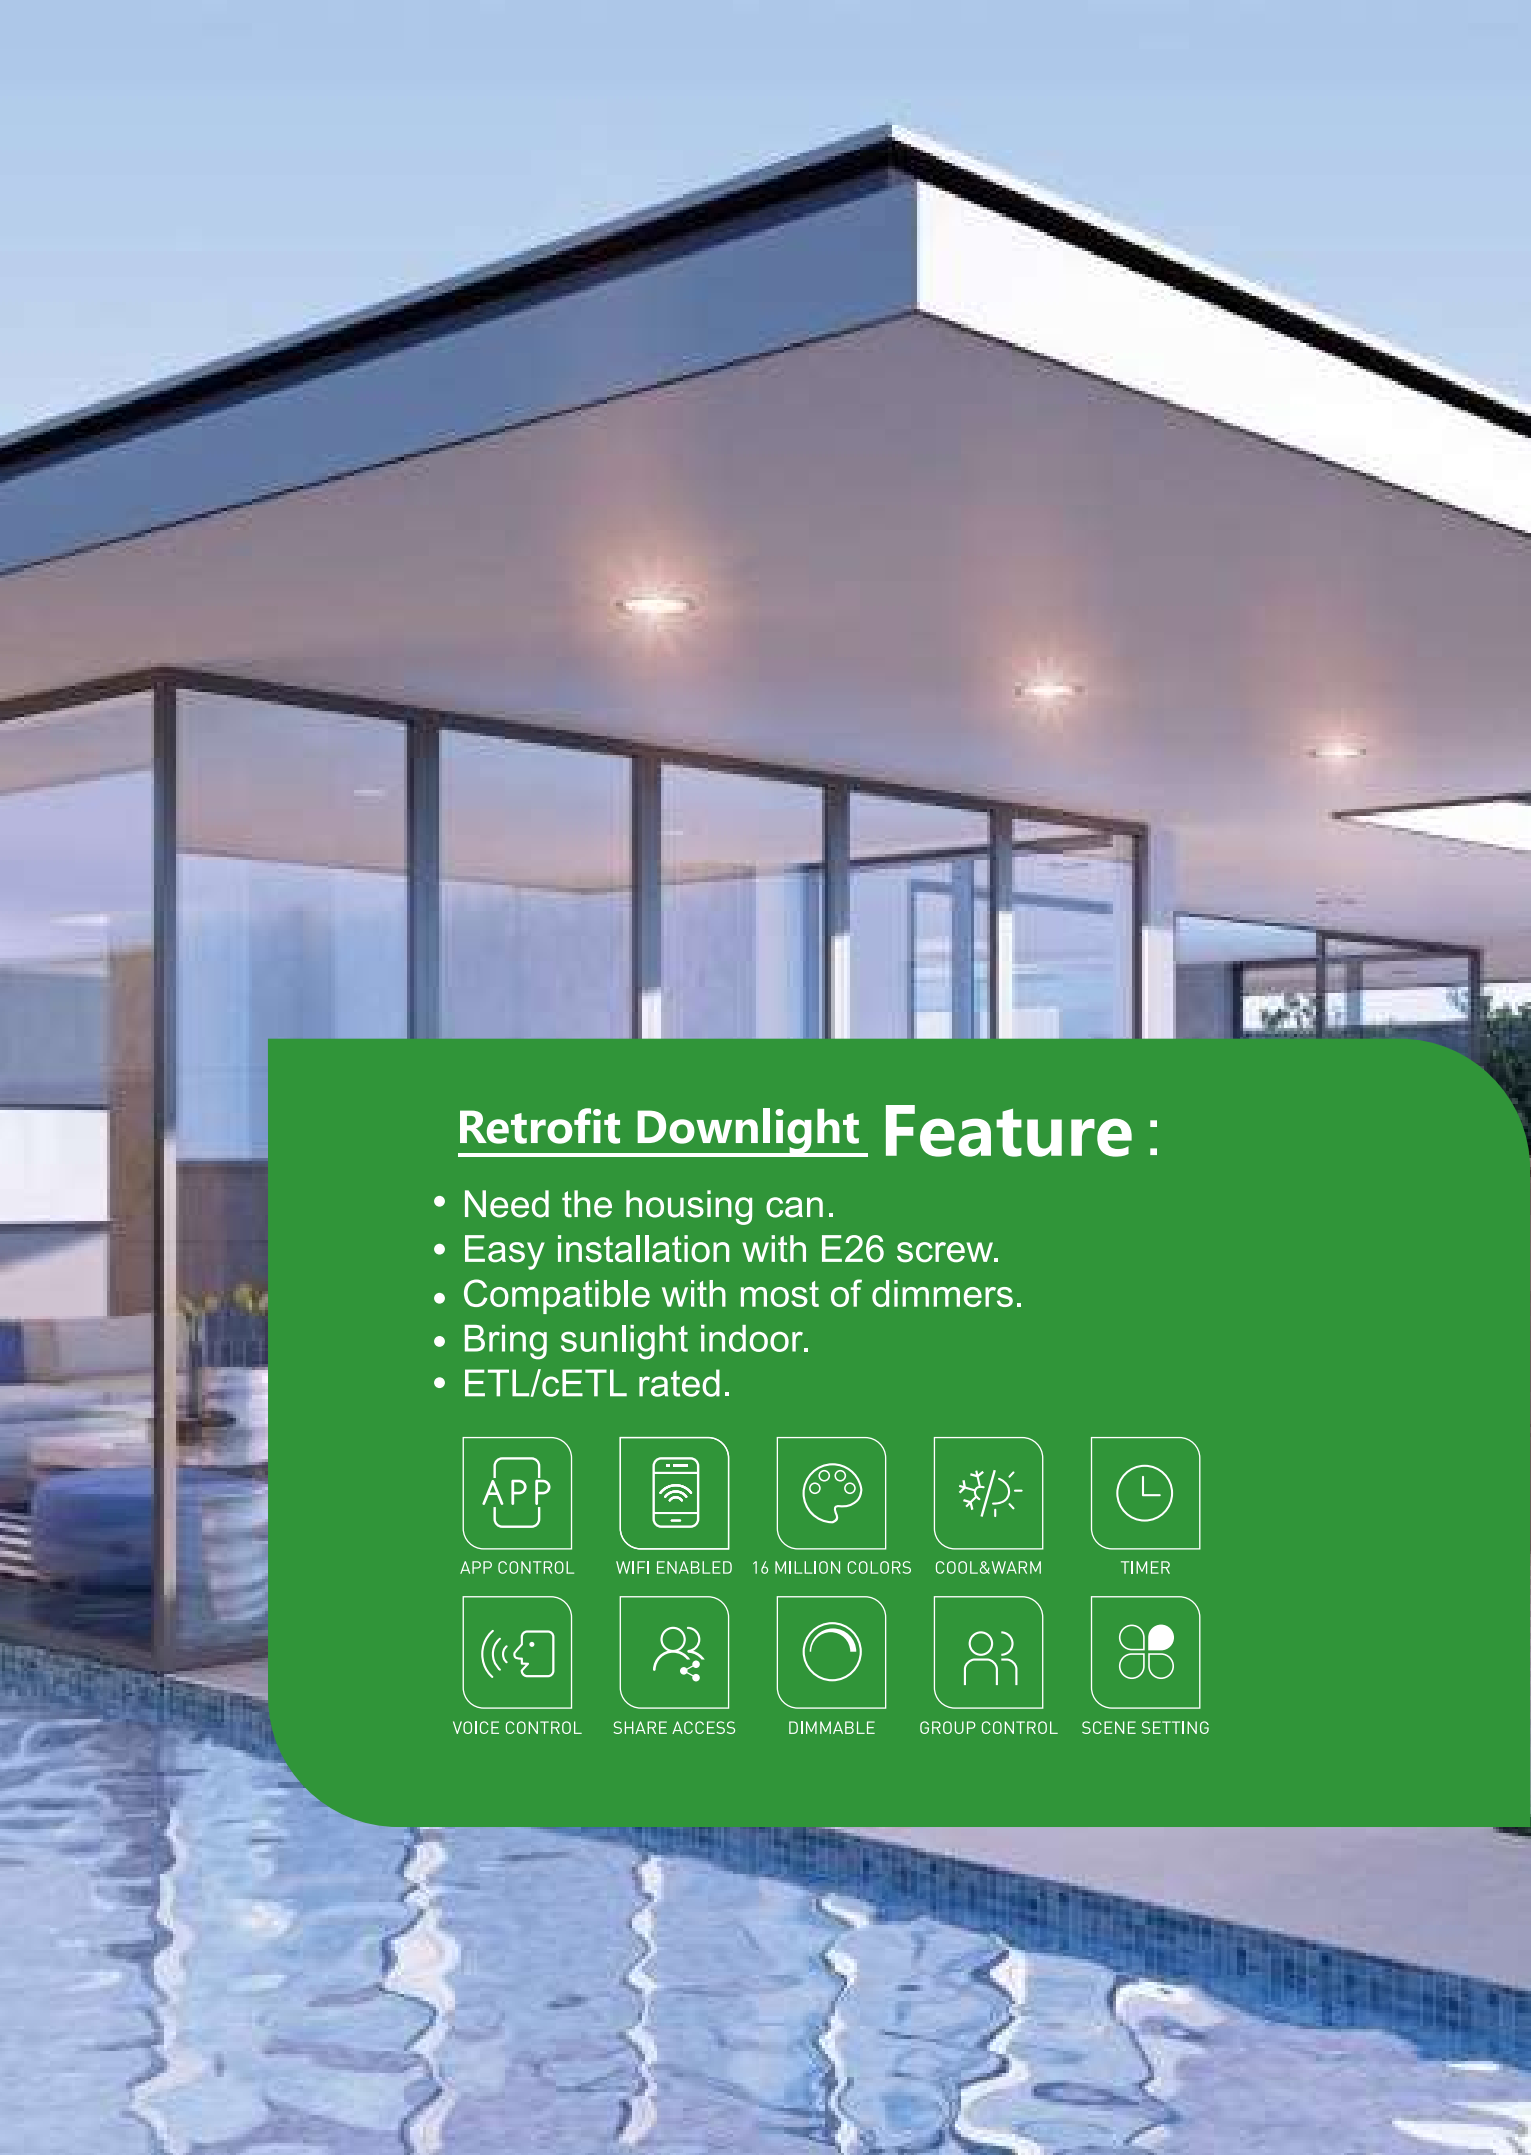

Retrofit Downlight Feature :

- Need the housing can.
- Easy installation with E26 screw.
- Compatible with most of dimmers.
- Bring sunlight indoor.
- ETL/cETL rated.



APP CONTROL



WIFI ENABLED



16 MILLION COLORS



COOL&WARM



TIMER



VOICE CONTROL



SHARE ACCESS



DIMMABLE



GROUP CONTROL



SCENE SETTING



DE1004DXXWH-14

Single CCT



Change the CCT by dip switch on driver box and wall switch.

DE1004G13WH-10



Change the CCT by dip switch on driver box and wall switch.

DE1004G15WH-10

3-CCT or 5-CCT

RGBCW color changing



DE1004WE1WH-10




WORKS WITH amazon alexa

works with Google Assistant

tuya



RGB + WW + CW

Smart series





DE1006DXXWH-14

Single CCT



Change the CCT by dip switch on driver box and wall switch.

DE1006G13WH-14





Change the CCT by dip switch on driver box and wall switch.

DE1006G15WH-14

3-CCT or 5-CCT

RGBCW color changing



DE1006WE1WH-14

WORKS WITH amazon alexa

works with Google Assistant

tuya

RGB + WW + CW

Smart series

PRODUCT DIMENSIONS



CERTIFICATES




SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DE1004DXXWH-10	10W	120VAC 60Hz	700/650	2700-6500K	>80/90	0.9	120°	YES	35,000H	3years
3CCT / 5CCT										
DE1004G13/G15WH-10	10W	120VAC 60Hz	700/650	Any3/5 colors you like	>80/90	0.9	120°	YES	35,000H	3years
SMART SERIES										
DE1004WE1WH-10	10W	120VAC 60Hz	700/650	RGB-2700K~6500K	>80/90	0.9	120°	YES	35,000H	3years


· Where "XX" represent different color temperature,it can be 27,30,40 and 50.


PRODUCT DIMENSIONS

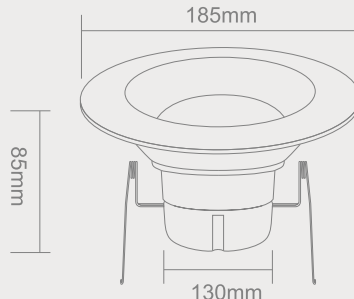

CERTIFICATES









SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DE1006DXXWH-14	14W	120VAC 60Hz	1000/900	2700-6500K	>80/90	0.9	120°	YES	35,000H	3years
3CCT / 5CCT										
DE1006G13/G15WH-14	14W	120VAC 60Hz	1000/900	Any3/5 colors you like	>80/90	0.9	120°	YES	35,000H	3years
SMART SERIES										
DE1006WE1WH-14	14W	120VAC 60Hz	1000/900	RGB-2700K~6500K	>80/90	0.9	120°	YES	35,000H	3years

▪ Where "XX" represent different color temperature,it can be 27,30,40 and 50.



LED Ceiling Light Feature :

- Instant start,no flashing.
- Bring sunlight indoor.
- Durable and energy-saving.
- ETL/cETL rated.



APP CONTROL



WIFI ENABLED



16 MILLION COLORS



COOL & WARM



TIMER



VOICE CONTROL



SHARE ACCESS



DIMMABLE



GROUP CONTROL



SCENE SETTING

12 " Mushroom Ceiling Light

24



CL0114DXXWH-15



Change the CCT by dip switch on driver box and wall switch.

CL0112G13WH-15



Change the CCT by dip switch on driver box and wall switch.

CL0112G15WH-15

RGBCW color changing



CL0112WE1WH-15

WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

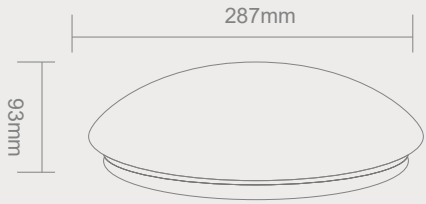


CERTIFICATES




SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0112DXXWH-15	15	120VAC 60Hz	1200/1100	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0112G13/G15WH-15	15	120VAC 60Hz	1200/1100	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0112WE1WH-15	15	120-277VAC 60Hz	1200/1100	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

· Where "XX" represent different color temperature, it can be 27,30,40 and 50.




CL0212DXXWH-15




CL0212G13WH-15

Change the CCT by dip switch on driver box and wall switch.



CL0212G15WH-15

Change the CCT by dip switch on driver box and wall switch.



CL0212WE1WH-15

RGBCW color changing

WORKS WITH amazon alexa

works with Google Assistant


tuya

RGB + WW + CW

Single CCT


3-CCT or 5-CCT

Smart series




CL0312DXXPT-15

BRUSHED NICKEL BLACK




CL0312G13PT-15

Change the CCT by dip switch on driver box and wall switch.



CL0312G15PT-15

Change the CCT by dip switch on driver box and wall switch.



CL0312WE1PT-15

RGBCW color changing

WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT


3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

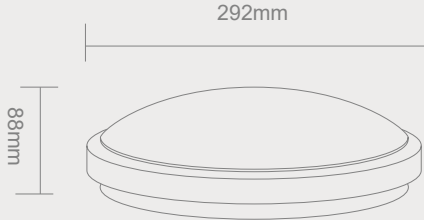

CERTIFICATES




SPECIFICATION


Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0212DXXWH-15	15	120VAC 60Hz	1200/1100	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0212G13/G15WH-15	15	120VAC 60Hz	1200/1100	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0212WE1WH-15	15	120-277VAC 60Hz	1200/1100	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

Where "XX" represent different color temperature,it can be 27,30,40 and 50.

PRODUCT DIMENSIONS

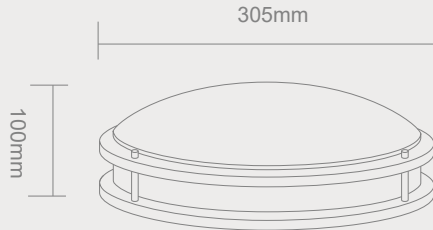

CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0312DXXPT-15	15	120VAC 60Hz	1200/1100	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0312G13/G15PT-15	15	120VAC 60Hz	1200/1100	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0312WE1PT-15	15	120-277VAC 60Hz	1200/1100	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

Where "XX" represent different color temperature,it can be 27,30,40 and 50.


CL0114DXXWH-20


CL0114G13WH-20


CL0114G15WH-20

Change the CCT by dip switch on driver box and wall switch.



Change the CCT by dip switch on driver box and wall switch.



RGBCW color changing


CL0114WE1WH-20

WORKS WITH amazon alexa

works with Google Assistant

tuya

RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series


CL0214DXXWH-20


CL0214G13WH-20


CL0214G15WH-20

Change the CCT by dip switch on driver box and wall switch.



Change the CCT by dip switch on driver box and wall switch.



RGBCW color changing


CL0214WE1WH-20

WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT


3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

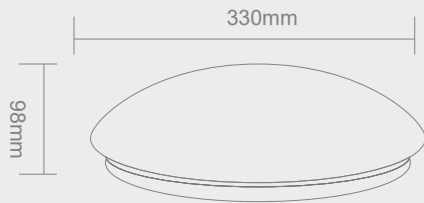

CERTIFICATES




SPECIFICATION


Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
DIMMABLE										
CL0114DXXWH-20	20	120VAC 60Hz	1600/1500	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0114G13/G15WH-20	20	120VAC 60Hz	1600/1500	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0114WE1WH-20	20	120-277VAC 60Hz	1600/1500	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.

PRODUCT DIMENSIONS

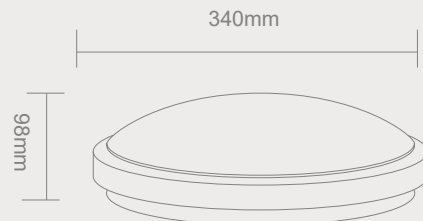


CERTIFICATES




SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0214DXXWH-20	20	120VAC 60Hz	1600/1500	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0214G13/G15WH-20	20	120VAC 60Hz	1600/1500	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0212WE1WH-20	20	120-277VAC 60Hz	1600/1500	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years


· Where "XX" represent different color temperature,it can be 27,30,40 and 50.



BRUSHED NICKEL BLACK





CL0314DXXPT-20



CL0314G13PT-20


Change the CCT by dip switch on driver box and wall switch.





CL0314G15PT-20

Change the CCT by dip switch on driver box and wall switch.





CL0314WE1PT-20

RGBCW color changing



WORKS WITH amazon alexa

works with Google Assistant

tuya

RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series



CL0116DXXWH-25



CL0116G13WH-25

Change the CCT by dip switch on driver box and wall switch.





CL0116G15WH-25

Change the CCT by dip switch on driver box and wall switch.





CL0116WE1WH-25

RGBCW color changing



WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT


3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

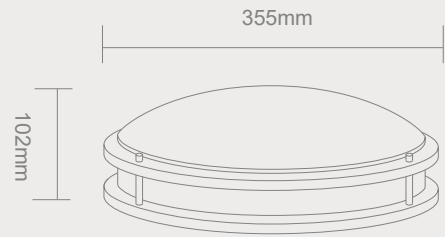

CERTIFICATES




SPECIFICATION


Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0314DXXPT-20	20	120VAC 60Hz	1600/1500	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0314G13/G15PT-20	20	120VAC 60Hz	1600/1500	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0314WE1PT-20	20	120-277VAC 60Hz	1600/1500	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.

PRODUCT DIMENSIONS

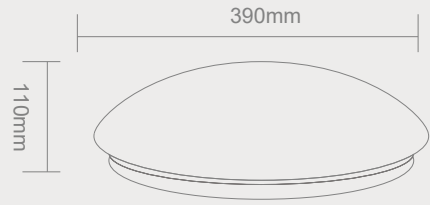


CERTIFICATES




SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0116DXXWH-25	25	120VAC 60Hz	2000/1800	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0116G13/G15WH-25	25	120VAC 60Hz	2000/1800	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0116WE1WH-25	25	120-277VAC 60Hz	2000/1800	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.




CL0216DXXWH-25




CL0216G13WH-25

Change the CCT by dip switch on driver box and wall switch.



CL0216G15WH-25

Change the CCT by dip switch on driver box and wall switch.



CL0216WE1WH-25

RGBCW color changing

WORKS WITH amazon alexa

works with Google Assistant

tuya

RGB + WW + CW

Single CCT


3-CCT or 5-CCT

Smart series




CL0316DXXPT-25

BRUSHED NICKEL BLACK




CL0316G13PT-25

Change the CCT by dip switch on driver box and wall switch.



CL0316G15PT-25

Change the CCT by dip switch on driver box and wall switch.



CL0316WE1PT-25

RGBCW color changing

WORKS WITH amazon alexa

works with Google Assistant

tuya


RGB + WW + CW

Single CCT

3-CCT or 5-CCT

Smart series

PRODUCT DIMENSIONS

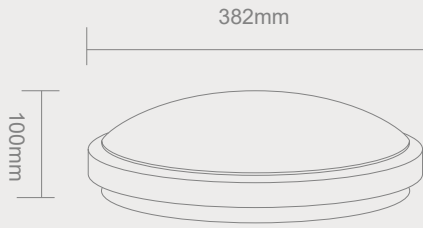

CERTIFICATES




SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0216DXXWH-25	25	120VAC 60Hz	2000/1800	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0216G13/G15WH-25	25	120VAC 60Hz	2000/1800	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0216WE1WH-25	25	120-277VAC 60Hz	2000/1800	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

Where "XX" represent different color temperature,it can be 27,30,40 and 50.

PRODUCT DIMENSIONS

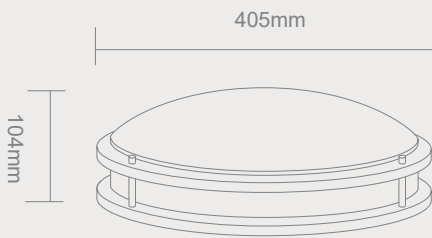

CERTIFICATES



SPECIFICATION

Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
CL0316DXXPT-25	25	120VAC 60Hz	2000/1800	2700-6500K	≥80/90	0.9	120°	YES	50,000H	5 years
3CCT / 5CCT										
CL0316G13/G15PT-25	25	120VAC 60Hz	2000/1800	Any3/5 colors you like	≥80/90	0.9	120°	YES	50,000H	5 years
SMART SERIES										
CL0316WE1PT-25	25	120-277VAC 60Hz	2000/1800	RGB-2700K~6500K	≥80/90	0.9	120°	YES	50,000H	5 years

Where "XX" represent different color temperature,it can be 27,30,40 and 50.



LED Motion Sensor Ceiling Light **Feature :**

- Activates when motion is sensed
- Quickly and easy installation
- Energy saving and longer life time
- Modern design for indoor using
- ETL/cETL rated.



DS0108DXX08-15


Single CCT



DS0108G1308-15

3-CCT


PRODUCT DIMENSIONS

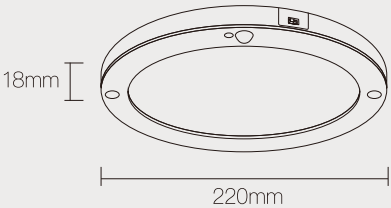

SPECIFICATION


Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
Single CCT										
DS0108DXX08-15	15W	120VAC 60Hz	1200	2700K-6500K	≥80	0.9	120°	NO	50,000H	5 years
3CCT										
DS0108G1308-15	15W	120VAC 60Hz	1200	Any 3 colors you like	≥80	0.9	120°	NO	50,000H	5 years

· Where "XX" represent different color temperature,it can be 27,30,40 and 50.

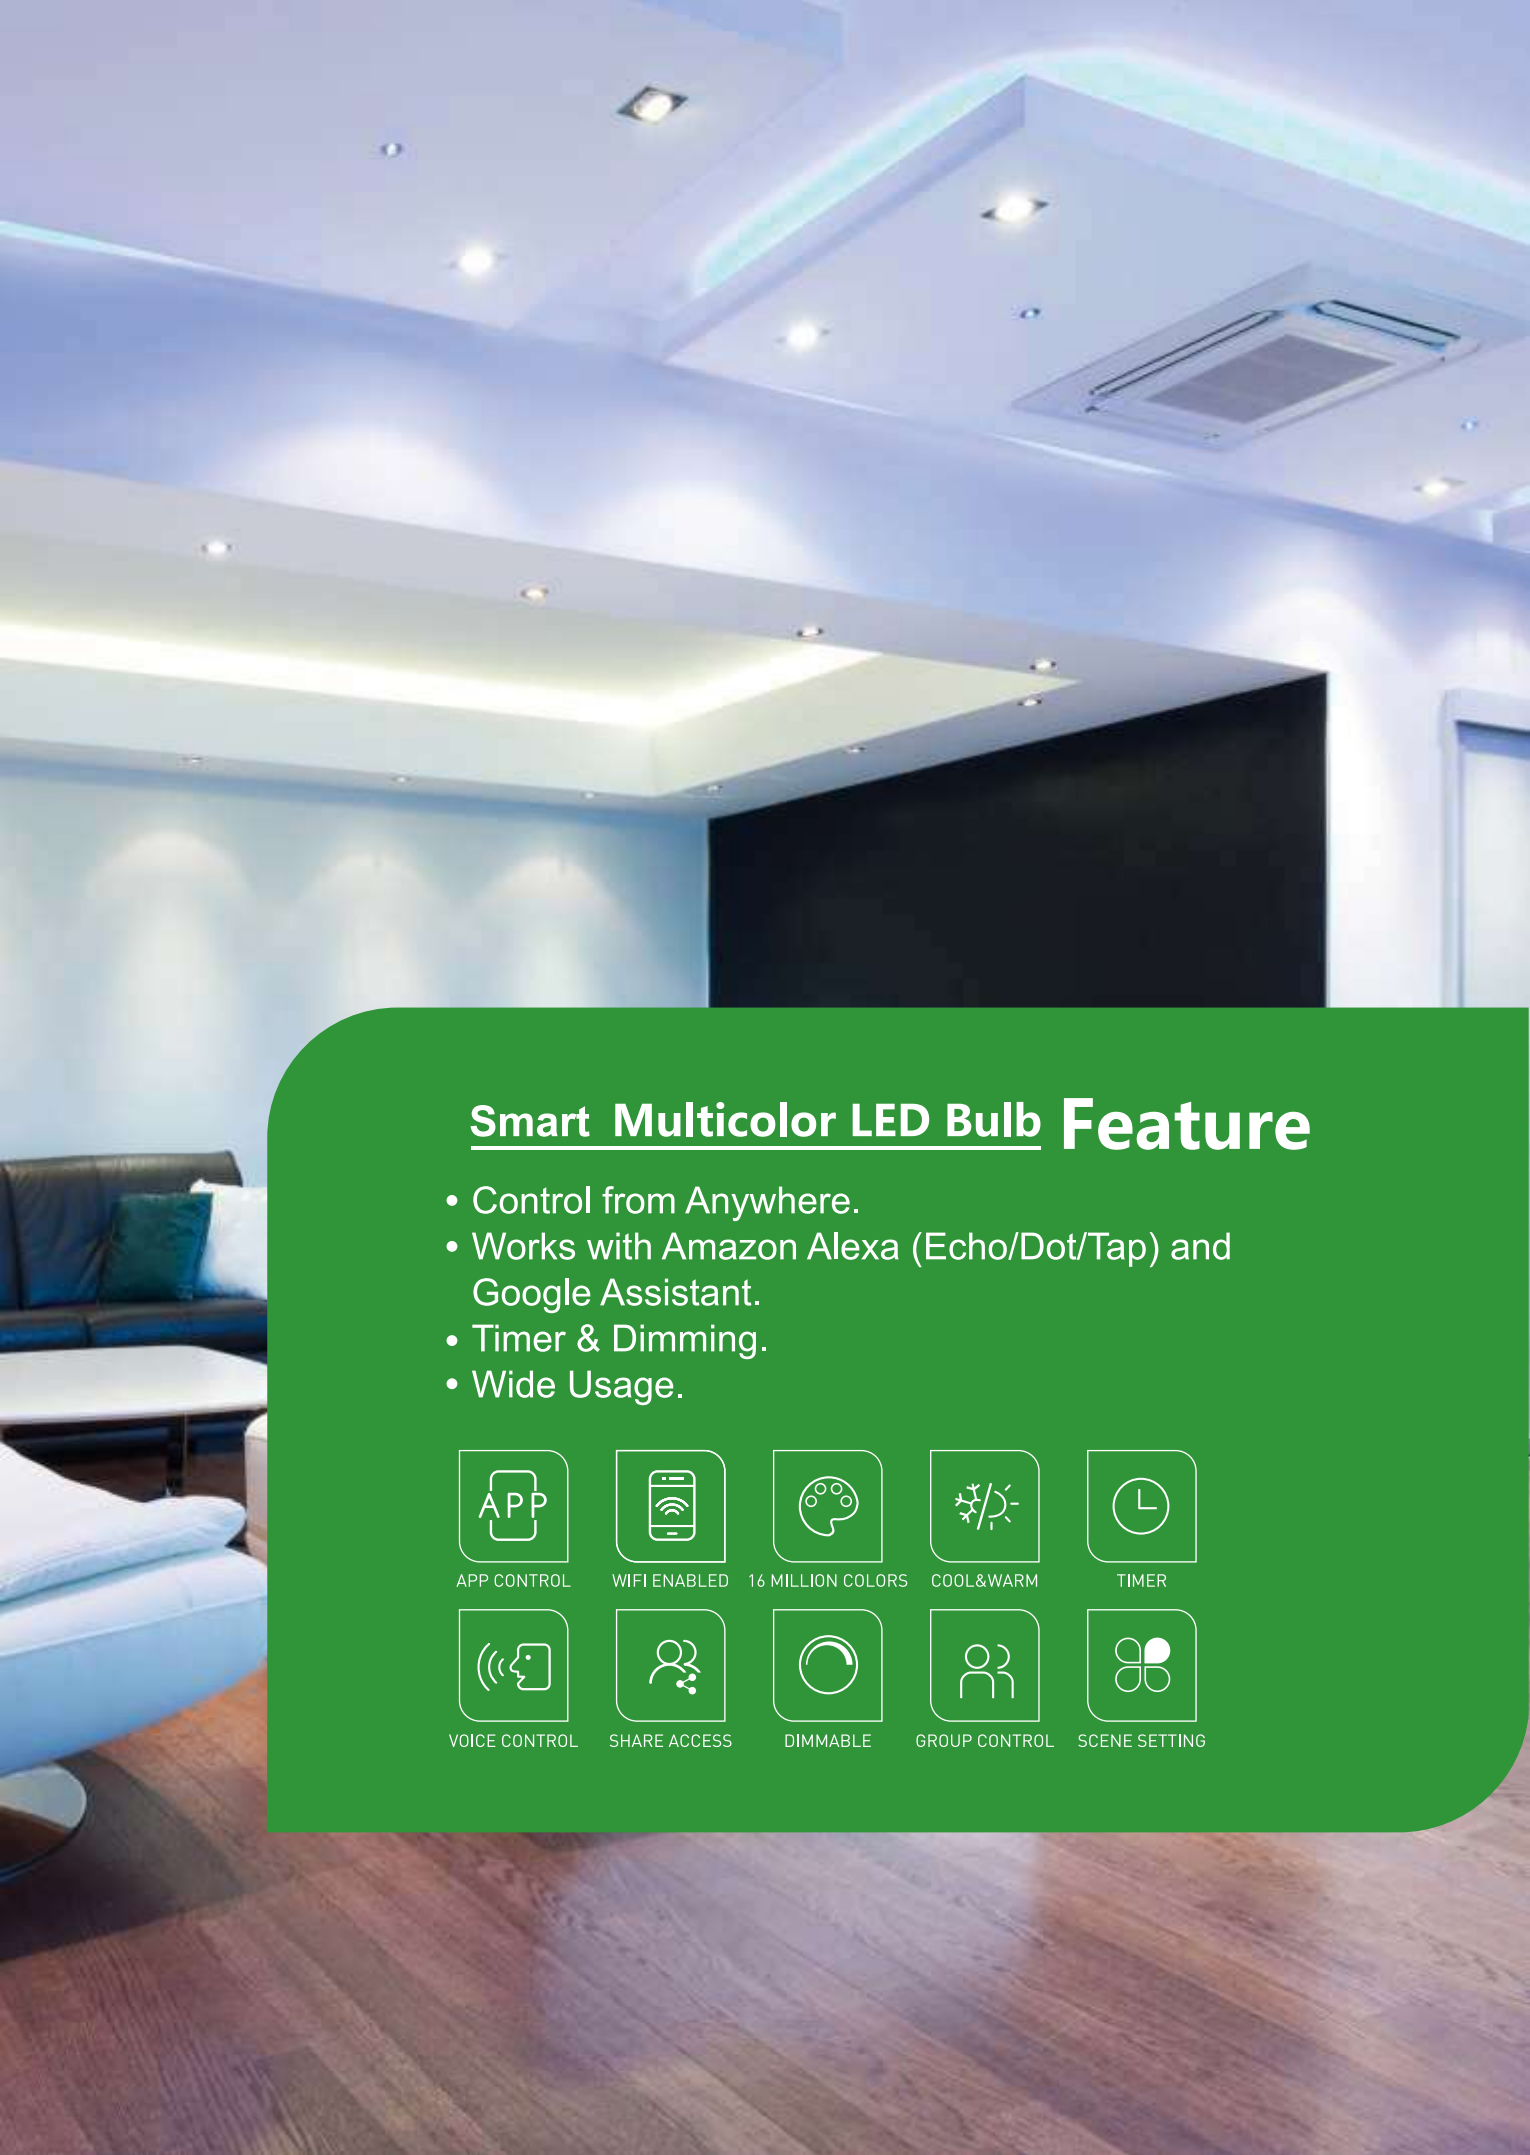


Smart Multicolor LED Bulb Feature


- Control from Anywhere.
- Works with Amazon Alexa (Echo/Dot/Tap) and Google Assistant.
- Timer & Dimming.
- Wide Usage.




APP CONTROL




WIFI ENABLED




16 MILLION COLORS




COOL&WARM




TIMER




VOICE CONTROL




SHARE ACCESS



DIMMABLE



GROUP CONTROL



SCENE SETTING

RGBCW color changing



BA1901WE1WH-08

RGBCW color changing



BR3001WE1WH-10

RGBCW color changing



PA3001WE1WH-10

RGBCW color changing



BA2101WE1WH-08

RGBCW color changing



BR4001WE1WH-15

RGBCW color changing



PA3801WE1WH-13

RGBCW color changing



GU1001WE1WH-05

PRODUCT DIMENSIONS



65mm 70mm 95mm 120mm 125mm 135mm 120mm 140mm 95mm 120mm 107mm 132mm 50mm 38mm

CERTIFICATES




SPECIFICATION										
Model	Power	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Dimmable	Lifespan	Warranty
SMART SERIES										
BA1901WE1WH-08	8W	120VAC60Hz	800	RGB+2700K~6500K	≥80	0.8	180°	YES	35,000H	3 years
BA2101WE1WH-12	12W	120VAC60Hz	1100	RGB+2700K~6500K	≥80	0.8	180°	YES	35,000H	3 years
GU1001WE1WH-05	5W	120VAC60Hz	350	RGB+2700K~6500K	≥80	0.5	40°	YES	35,000H	3 years
BR3001WE1WH-10	10W	120VAC60Hz	800	RGB+2700K~6500K	≥80	0.8	120°	YES	35,000H	3 years
BR4001WE1WH-15	15W	120VAC60Hz	1300	RGB+2700K~6500K	≥80	0.9	120°	YES	35,000H	3 years
PA3001WE1WH-10	10W	120VAC60Hz	800	RGB+2700K~6500K	≥80	0.8	40°	YES	35,000H	3 years
PA3801WE1WH-15	15W	120VAC60Hz	1300	RGB+2700K~6500K	≥80	0.9	40°	YES	35,000H	3 years



Smart LED Strip Feature :

- Waterproof and Non-waterproof for options.
- RGBCW control by smart APP and voice.
- Easy installation anywhere.
- Long life time.


Water-proof



SF1205LE1TP-24

APP+Remote Control


Non-waterproof



SF1205LE1TB-24

APP+Remote Control


Water-proof



SF1205WE1TP-24

APP Control

Non-waterproof




SF1205WE1TB-24

APP Control

Smart series

PRODUCT DIMENSIONS

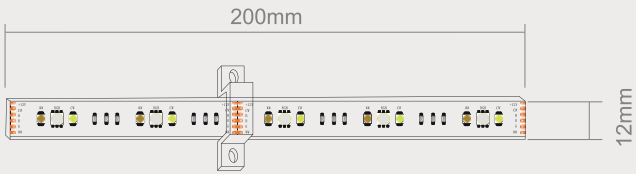

APP

APP CONTROL

WIFI

WIFI ENABLED

16M

16 MILLION COLORS

COOL&WARM

COOL&WARM

TIMER

TIMER

VOICE

VOICE CONTROL

SHARE

SHARE ACCESS

DIMMABLE

DIMMABLE

GROUP

GROUP CONTROL

SCENE

SCENE SETTING

SPECIFICATION

Model	Power	Size	Input Voltage	Lumen	CCT	CRI	PF	Beam Angle	Water-proof	Lifespan	Warranty
SMART SERIES											
SF1205LE1TP-24	24W	5M	DC12	1000	RGB+2700K/6500K	≥80	0.9	150°	IP64	35,000H	3 years
SF1205WE1TB-24	24W	5M	DC12	1000	RGB+2700K~6500K	≥80	0.9	150°	IP20	35,000H	3 years
SF1205WE1TP-24	24W	5M	DC12	1000	RGB+2700K~6500K	≥80	0.9	150°	IP64	35,000H	3 years
SF1205LE1TB-24	24W	5M	DC12	1000	RGB+2700K/6500K	≥80	0.9	150°	IP20	35,000H	3 years

ADVANTAGE OF THE SMART LIGHTS

Multicolor LED Bulb

There are over 16 million color options in one Smart RGBCW LED Bulb. Every color is dimmable. You can change from Warm White, Cool White to multiple RGB colors, having fun in expanding limitless lighting possibilities for your projects.

Control from Anywhere

Turn smart bulbs on or off from anywhere with your smartphone using the Smart Life app (Compatible w/ Android & iOS). Set-up is easy and takes only a few minutes with the detailed manual.

Voice Control Works with Amazon Alexa (Echo/Dot/Tap) and Google Assistant for voice control.

Timer & Dimming

Schedule bulbs to wake you up in the morning, to turn on when you are back and so on. Stepless dimming from 0-100% to turn bulbs into nightlight, reading light and sleep lamp etc.

Wide Usage

This bulb conforms to FCC & RoHS standards for safety and quality assurance. 8 scenes to meet your needs on ambience lighting for home, office, hotel, conference room, museum, bar, cafe, restaurants, birthday party etc.



HOW TO CHANGE THE COLOR TEMPERATURE OF THE 3/5 IN 1 LIGHTS?

CCT changeable by Dip switch and Wall switch:

1.By Dip SWITCH;

The dip switches called CCT select-able , push the switch to choose the color temperature you want.

2.Wall SWITCH;

Firstly,switch the "SW" on the dip switch, then turn on the light,it is 3000K, switch on and off again within 2 seconds,the color is changed to 4000K, switch on and off again within 2 seconds one more time, the color is changed to 5000K. If you power off the lamp longer than 6 seconds, it will keep the same CCT as previous.

It is also compatible the dimmer, can be dimmable.

How to restore the factory settings?

Firstly,turn on the light, and off-on 8 times, then the light is in the factory setting, the CCT is 3000K.

BALLAST COMPATIBLE (UL TYPE A)

Ballast compatible Type A LED T8 retrofits of existing fluorescent fixtures utilize the existing instant start or programmed start fluorescent ballast to operate the LED T8 lamp. This approach simplifies the installation. Remove the fluorescent tube and replace it with the LED tube. No re-wiring required.

Feature:

- Can be frosted (coated with film or painted inside) or clear one
- No socket change required
- No rewiring or modifications of any kind required
- High performance
- Wide ambient temperature range: -4°F to 113°F
- NSF listed for commercial food service
- UL Listed & DLC5.0/DLC5.1 Certification


TypeA Tube Series

TypeA Tube Series

UL TypeA

Appearance

- F – frosted by coating film
- M – frosted by painted white inside
- C – clear

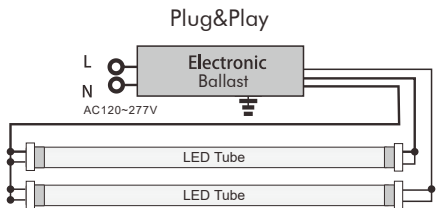

PRODUCT DIMENSIONS



CERTIFICATES



SPECIFICATION

Model	Power	Voltage	Lumen	CCT	CRI	PF	Beam Angle	Lifespan	Warranty	Certificate
T08A02K-XXF-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A02K-XXM-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A02K-XXC-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A02K-XXF-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A02K-XXM-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A02K-XXC-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending

Where "XX" represent different color temperature, it can be 27,30,40 and 50.

BALLAST BYPASS (UL TYPE B)

Install these tubes using the ballast bypass method. Bypassing the ballast during initial tube replacement will save you both time and money as ballasts inevitably fail over time and will require replacement. Ballasts also consume electrical power and by bypassing them you will save even more on your energy bill.

Feature:

- Can be frosted (coated with film or painted inside) or clear one
- Install without ballast and one or double end power supply
- Requires non-shunted socket at line voltage input
- High performance
- Wide ambient temperature range: -4°F to 113°F
- NSF listed for commercial food service
- UL Listed & DLC Certification


Bypass Tube Series

Bypass Tube Series


UL TypeB

Appearance

F – frosted by coating film
M – frosted by painted white inside
C – clear

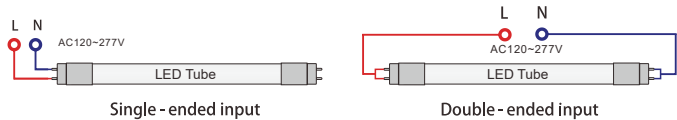

PRODUCT DIMENSIONS

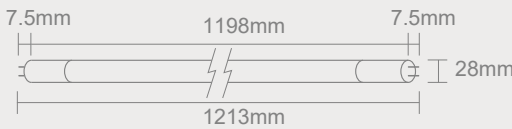

CERTIFICATES



SPECIFICATION

Model	Power	Voltage	Lumen	CCT	CRI	PF	Beam Angle	Lifespan	Warranty	Certificate
T08B02K-XXF-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08B02K-XXM-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08B02K-XXC-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08B02K-XXF-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08B02K-XXM-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08B02K-XXC-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending

Where "XX" represent different color temperature, it can be 27,30,40 and 50.

HYBRID SERIES - BALLAST COMPATIBLE & BYPASS

(Only single end with UL certification)

The primary feature of these hybrid series LED T8 lamps is that they can initially operate directly with or without compatible fluorescent ballasts, providing a simple, low cost migration to LED. For bypassing the ballast, can work as single end power supply.

Feature



- Can be frosted (coated with film or painted inside) or clear one
- Work with the instant and programmed ballast
- Work without the ballast with single end power supply
- High performance
- Wide ambient temperature range: -4°F to 113°F
- NSF listed for commercial food service
- UL Listed & DLC Certification

Hybrid Tube Series


UL TypeA + UL TypeB (only sigle end with UL certification)
But can also be direct wire at two end

Appearance

F – frosted by coating film
M – frosted by painted white inside
C – clear

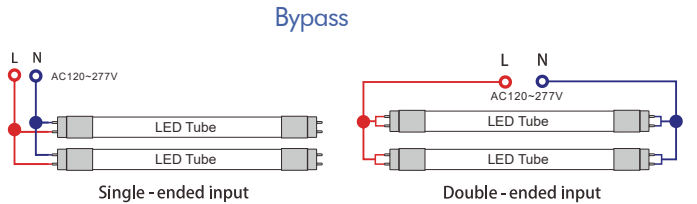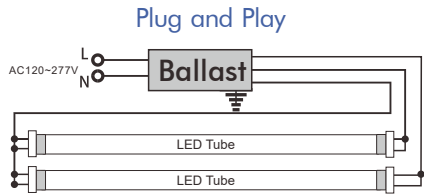

PRODUCT DIMENSIONS

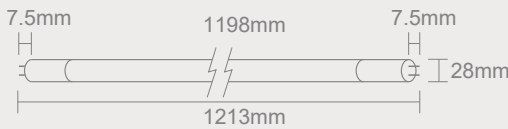

CERTIGICATES



SPECIFICATION

Model	Power	Voltage	Lumen	CCT	CRI	PF	Beam Angle	Lifespan	Warranty	Certificate
T08A01K-XXF-18	18W	120-277V	2200LM	3000K-5000K	≥90	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A01K-XXM-18	18W	120-277V	2200LM	3000K-5000K	≥90	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A01K-XXC-18	18W	120-277V	2200LM	3000K-5000K	≥90	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A01K-XXF-12	12W	120-277V	1600LM	3000K-5000K	≥90	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A01K-XXM-12	12W	120-277V	1600LM	3000K-5000K	≥90	0.9	220°	50,000H	5 years	UL+DLC Pending
T08A01K-XXC-12	12W	120-277V	1600LM	3000K-5000K	≥90	0.9	220°	50,000H	5 years	UL+DLC Pending

DUAL MODE - BALLAST COMPATIBLE & BYPASS

(Both single end and double end power supply)



The primary feature of these dual mode series LED T8 lamps is that they can initially operate directly with or without compatible fluorescent ballasts, providing a simple, low cost migration to LED. For bypassing the ballast, can work as single or double end power supply.

Dual Mode Tube Series


UL TypeA + UL TypeB work with or without ballasts
(bypass single end & double end with UL certification)

Appearance

- F – frosted by coating film
- M – frosted by painted white inside
- C – clear

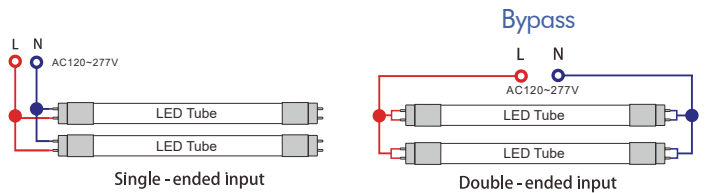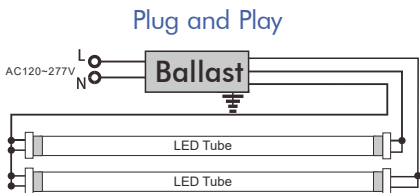

PRODUCT DIMENSIONS

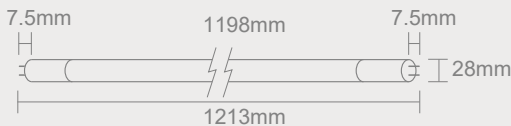

CERTIFICATES



SPECIFICATION

Model	Power	Voltage	Lumen	CCT	CRI	PF	Beam Angle	Lifespan	Warranty	Certificate
T08AB01-XXF-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08AB01-XXM-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08AB01-XXC-18	18W	120-277V	2200LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08AB01-XXF-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08AB01-XXM-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending
T08AB01-XXC-12	12W	120-277V	1600LM	3000K-5000K	≥80	0.9	220°	50,000H	5 years	UL+DLC Pending

Feature

- Can be frosted (coated with film or painted inside) or clear one
- Work with the instant and programmed ballast
- Work without the ballast as single or double-ended connection
- Keep original tombstones (shunted sockets)
- High performance
- Wide ambient temperature range: -4°F to 113°F
- NSF listed for commercial food service
- UL Listed & DLC Certification

Where "XX" represent different color temperature, it can be 27,30,40 and 50.